



**SKYTECH**  
P R O D U C T S G R O U P



**Controls,  
valves & accessories  
from the leader in  
the hearth industry.**

2016

A powerful blend of experience, imagination and technical horsepower make Skytech the recognized leader in the remote systems industry. For more than 20 years, we have lead the way with bold innovation, bullet-proof reliability and real-time support. When the fireplace and hearth industry need something done right, they count on Skytech to

# make it happen.







# Skytech remotes and accessories...



« 5001

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Touchscreen transmitter
- ON/OFF control
- Backlit LCD screen
- Flame icon indicator
- Low battery indicator
- Child safety lock out
- Wall mount docking station

« 5010

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Touchscreen transmitter
- ON/OFF control
- Backlit LCD screen
- Flame icon indicator
- Low battery indicator
- Child safety lock out
- Wall mount docking station

## Skytouch Series





« 5301

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- 9-hour countdown timer
- Child safety lock out
- Wall mount docking station

« 5310

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- 9-hour countdown timer
- Child safety lock out
- Wall mount docking station

5301P »

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- Programmable (Weekday/Weekend) (5/2)
- Wall mount docking station

5310P »

- Battery operated transmitter - RF
- 110VAC plug-in receiver
- 1,048,576 security codes
- Touchscreen transmitter
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- Programmable (Weekday/Weekend) (5/2)
- Wall mount docking station





« 1001-A

All battery operated transmitter & receiver - RF  
 ON/OFF transmitter  
 65,536 security codes  
 All batteries and wall clip included  
 Receiver will learn up to two additional Skytech transmitters



FG-105 ⤴

All battery operated transmitter & receiver - RF  
 255 security codes



1001T-LCD-A ⤴

All battery operated transmitter & receiver - RF  
 ON/OFF transmitter  
 LCD display room temperature in °F or °C,  
 3-hour countdown timer  
 Flame icon indicator  
 Low battery indicator  
 1,048,576 security codes  
 Receiver will learn up to two additional Skytech transmitters



CON ⤴

All Battery operated transmitter & receiver - RF  
 ON/OFF transmitter  
 Single function control for operating latching solenoid gas valve systems  
 65,536 security codes

# On/Off Battery Units



**TS-R-2A »**

All Battery operated transmitter & receiver - RF

Wireless thermostat or manual ON/SET/OFF operation

Large LCD screen displays room and set temperature in °F or °C

1,048,576 security codes

Flame icon indicator

Low battery indicator



**1001D-A »**

All battery operated transmitter & receiver - RF

Wireless wall switch, surface mount

65,536 security codes

Receiver will learn up to two additional Skytech transmitters




**« TM-R-2A**

All battery operated transmitter & receiver - RF

65,536 security codes

Receiver will learn up to two additional Skytech ON/OFF transmitters

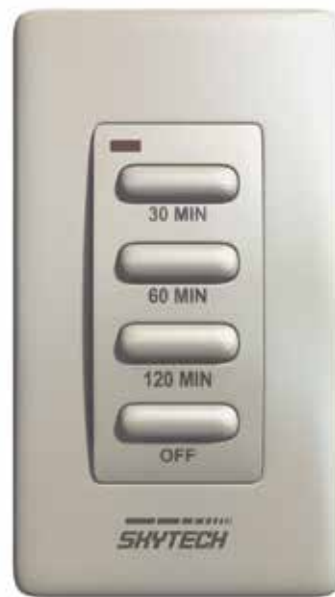

# Wireless Wall Units



« 3301P2

- All battery operated transmitter & receiver - RF
- 1,048,576 security codes
- Backlit LCD screen
- Thermostatic control
- Flame icon indicator
- Low battery indicator
- Programmable (Weekday/Weekend) (5/2)
- Swing temperature (adjustable 1 - 3 degrees)



3301 »

- All Battery operated transmitter & receiver - RF
- 1,048,576 security codes
- LCD displays both room and thermostat set temperature in °F or °C
- Thermostatic control
- 9-hour countdown timer and 24-hour clock
- Flame icon indicator
- Low battery indicator
- Swing temperature (adjustable 1 - 3 degrees)

1001TH-A »

- All battery operated transmitter & receiver - RF
- 4-button ON/OFF/MODE/SET transmitter
- LCD display room and thermostat temperature in °F or °C
- Flame icon indicator
- Low battery indicator
- 1,048,576 security codes
- Receiver will learn up to two additional Skytech transmitters



« CON-TH

- All battery operated transmitter & receiver - RF
- LCD display for room and set temperature in °F or °C
- ON/OFF control
- Flame icon indicator
- Low battery indicator
- Single function control for operating latching solenoid gas valve systems



# Thermostatic and Programmable Units





« 3301P

All battery operated transmitter & receiver - RF  
 LCD display room and set temperature in °F or °C  
 Programmable thermostat setting, 7 days / 4 periods per day  
 1,048,576 security codes  
 9-hour countdown timer and 24-hour clock  
 Flame icon indicator  
 Low battery indicator  
 Swing temperature (adjustable 1 - 3 degrees)



« 3301PF

Battery operated transmitter - RF  
 110VAC plug-in receiver  
 1,048,576 security codes  
 Programmable thermostat setting, 7 days / 4 periods within one day  
 LCD displays both room and set temperature in °F or °C  
 Thermostatic control  
 9-hour countdown timer and 24-hour clock  
 Flame icon indicator  
 Low battery indicator  
 Swing temperature (adjustable 1 - 3 degrees)



« 3002

All battery operated transmitter & receiver - RF  
 1,048,576 security codes  
 LCD displays both room and set temperature in °F or °C  
 Thermostatic control  
 9-hour countdown timer  
 24-hour clock  
 Flame icon indicator  
 Low battery indicator  
 Swing temperature (adjustable 1 - 3 degrees)

FGP-305 »

All battery operated transmitter & receiver - RF  
 1,048,576 security codes  
 LCD displays both room and set temperature in °F or °C  
 Thermostatic control  
 9-hour countdown timer  
 24-hour clock  
 Flame icon indicator  
 Low battery indicator  
 Swing temperature (adjustable 1 - 3 degrees)  
 Programmable thermostat setting, 7 days / 4 periods within one day



**1410TLCD-A »**

Battery operated transmitter - RF  
110VAC plug-in receiver  
ON/OFF transmitter  
LCD display room temperature in °F or °C,  
3-hour countdown timer  
Flame icon indicator  
Low battery indicator  
1,048,576 security codes  
110VAC receiver with learn function, slide switch ON/REMOTE/OFF to manually operate the appliance  
Receiver will learn up to two additional Skytech transmitters



**« 1410TH-A**

Battery operated transmitter - RF  
110VAC plug-in receiver  
ON/OFF transmitter  
LCD display room and thermostat temperature in °F or °C  
Flame icon indicator  
Low battery indicator  
1,048,576 security codes  
110VAC receiver with learn function, slide switch ON/REMOTE/OFF to manually operate the appliance  
Receiver will learn up to two additional Skytech transmitters



**« 1315G-A**

Battery operated transmitter - RF  
110VAC plug-in receiver  
ON/OFF handheld control  
255 security codes, 1800 watts  
Receiver with 110VAC with 3-prong outlet and inlet

**1410-A »**

Battery operated transmitter - RF  
110VAC plug-in receiver  
ON/OFF transmitter  
65,536 security codes  
110VAC receiver with learn function, slide switch ON/REMOTE/OFF to manually operate the appliance  
Receiver will learn up to two additional Skytech transmitters



# Remote Controls with 110 Volt Receivers



### MRCK ⚡

- All battery operated transmitter & receiver - RF
- Infinite flame adjustment from remote control
- 65,536 security codes
- Single function control for operating the servo motor valve system



### MRCK-TH ⚡

- All battery operated transmitter & receiver - RF
- Infinite flame adjustment from remote control
- 65,536 security codes
- LCD display for room and set temperature in °F or °C
- Flame icon indicator
- Low battery indicator
- Single function control for operating the servo motor valve system

## Modulating Flame Units





**WS** ⤴

Decorative rocker-style wall switch and cover plate  
UL listed switch  
20 foot 18-2 low-voltage wire included



**TS-3** ⤴

Wired thermostat or manual ON/SET/OFF operation surface mount  
Large LCD screen to display room and set temperature in °F or °C  
Flame icon indicator  
Low battery indicator



**TM-3** ⤴

Battery operated wired transmitter



**1310** ⤴

Santa's Helper  
Battery operated transmitter - RF  
110VAC plug-in receiver  
2-button ON/OFF transmitter  
255 security codes, 1440 watts  
110VAC Receiver with 2-prong outlet and inlet



**RS-1A** ⤴

Copolymer Tepcon material receiver cover  
High temperature material, 230 °F  
Improves RF communication



**RS-2** ⤴

Log-style receiver cover  
Solid refractory construction



**1001TX-A** ⤴

Battery operated transmitter - RF  
ON/OFF transmitter  
65,536 security codes  
Battery & wall clip included



**PRIVATE LABELING** ⤴

We offer a private label program to help dealers promote their business and create greater customer awareness. Call us for ordering information.

# Accessories



# Valve systems...





« **AFVK-SP-MH-L**

- Spark to pilot valve kit measures 3-3/4 inch W x 5-1/2 inch D x 5-1/2 inch H
- ON/OFF/HIGH/LOW remote control included
- Infinite flame adjustment from remote control
- Continuous pilot switch on valve box and remote control
- Quick mount pilot assembly
- Damper clamp included
- Propane conversion kits are available
- All battery operated



**AFVK-SP** ⤴

- Spark to pilot valve kit measures 3-3/4 inch W x 5-1/2 inch D x 5-1/2 inch H
- Manual flame adjustment
- ON/OFF remote control included
- Continuous pilot switch on valve box and remote control
- Quick mount pilot assembly
- Damper clamp included
- Propane conversion kits are available
- All battery operated



**AFVK-SP-H-L** ⤴

- Spark to pilot valve kit measures 3-3/4 inch W x 5-1/2 inch D x 5-1/2 inch H
- ON/OFF/HIGH/LOW remote control included
- High or low flame adjustment from remote control
- Continuous pilot switch on valve box and remote control
- Quick mount pilot assembly
- Damper clamp included
- Propane conversion kits are available
- All battery operated

# AFVK-SP Series

## All Battery Operated Electronic Spark to Pilot Gas Valve Systems





### « AFVK-SP-MH-L-SPLIT

Spark to pilot valve kit measures 2-3/4 inch W x 5-3/4 inch D x 5-3/4 inch H

High temperature cable connecting each box

ON/OFF/HIGH/LOW remote control included

Infinite flame adjustment from remote control

Continuous pilot switch on valve box and remote control

Quick mount pilot assembly

Damper clamp included

Propane conversion kits are available

All battery operated



### AFVK-SP-SPLIT ⤴

Spark to pilot valve kit measures 2-3/4 inch W x 5-3/4 inch D x 5-3/4 inch H

High temperature cable connecting to each box

Manual flame adjustment

ON/OFF remote control included

Continuous pilot switch on valve box and remote control

Quick mount pilot assembly

Damper clamp included

Propane conversion kits are available

All battery operated



### AFVK-SP-H-L-SPLIT ⤴

Spark to pilot valve kit measures 2-3/4 inch W x 5-3/4 inch D x 5-3/4 inch H

High temperature cable connecting each box

ON/OFF/HIGH/LOW remote control included

High or low flame adjustment from remote control

Continuous pilot switch on valve box and remote control

Quick mount pilot assembly

Damper clamp included

Propane conversion kits are available

All battery operated

## AFVK-SP-SPLIT Series

# All Battery Operated Electronic Spark to Pilot Split Gas Valve Systems



**AF-LMF** ⤴

30-Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available

Easy upgrade to remote operation

**AF-LMF-RVS** ⤴

Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

HIGH/MED/LOW remote control included

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available

Not recommended for vented gas log sets under 70,000 BTUs

# AF-LMF Series Safety Pilot Kit and Remote Systems



### « AF-LMF-RD

30-Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

Touch screen ON/OFF remote control included

Exclusive safety seal within gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available



### AF-LMF-R ⚡

Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

ON/OFF remote control included

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available



### AF-LMF-RV ⚡

Millivolt manual safety pilot kit measuring 3-3/4 inch W x 4 inch D x 2-3/4 inch H

225 degree rated valve

Designed specifically for use with vented gas logs

Variable flame remote control included

Exclusive safety seal within the gas valve

Quick mount pilot assembly

Damper clamp included

Propane conversion kits available

Recommended for vented gas log sets under 70,000 BTUs





« **RCAF-LMF-RD**

ON/OFF touch screen remote control for AF-LMF series gas valve kits

Includes solenoid, batteries, wire kit & receiver shield



« **TM-R-AF1TX**

Wireless wall timer switch for AF-LMF series gas valve kits

Includes batteries, wire kit & receiver shield

Requires AF-1000S solenoid (not included)



« **WS**

Wired wall switch

For use with LS CONVERTER for AF-LMF series gas valve kits



« **RCAF-LMF-WWS**

ON/OFF wireless wall switch for AF-LMF series gas valve kits

Includes solenoid, batteries, wire kit & receiver shield

# AF-LMF Series Valve Kit Accessories



### RCAF-LMF-V ⤴

Variable flame adjustment remote control for AF-LMF series gas valve kits

Includes variable flame motor drive, batteries, wire kit & receiver shield



### RCAF-LMF ⤴

ON/OFF remote control for AF-LMF series gas valve kits

Includes solenoid, batteries, wire kit & receiver shield



### LSCONVERTER ⤴

Wired wall switch converter for AF-LMF series gas valve kits

20 foot low voltage switch wire included

Requires AF-1000S solenoid + WS (wall switch)



### AF-1000S ⤴

Solenoid for AF-LMF series gas valve kits



**1001D-AF1TX** ⚡

Wireless wall switch transmitter for use with AFVK-SP series gas valve kits

Includes wireless ON/OFF switch & batteries



**1322WT** ⚡

Wireless Hi/Low transmitter

For use with all AFVK-SP-H-L & AFVK-SP-MH-L valve kits

Includes Hi/Low wireless transmitter & batteries



**TM-R-AF1** ⚡

Wireless timer for use with AFVK-SP series gas valve kits

Includes 30/60/120/OFF wireless timer & batteries



**AF-4000HAT** ⚡

Home automation receiver

Connects to home automation systems

For use with AFVK-SP valve kit

Includes home automation receiver, wall plate & batteries



**AF-4000ADP24(80)** ⚡

110VAC power source for AFVK-SP series gas valve kits



**AFVK-SP-PILOT60** ⚡

Natural gas pilot assembly

Kit provides 60 inch wire leads and pilot tubing

For use with all Skytech spark to pilot systems

# AFVK-SP Series Valve Kit Accessories





Universal  
fan kits...



Dimensions: 12-3/4 inch Length x 4-3/8 inch High x 4-5/16 inch Deep

« **F-180-1**

- Sealed ball bearing construction
- Quiet operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Dual fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty



**FK-180-ESC** ⤴

- Sealed ball bearing construction
- Quiet operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Dual fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes FK-ESC fan control



**FK-180-RT** ⤴

- Sealed ball bearing construction
- Quiet operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Dual fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes Rheostat control and temperature sensor





Dimensions: 12-3/4 inch Length x 4 inch High x 3-1/2 inch Deep

« **F-165-1**

- Low profile compact design fits most fireplaces
- Sealed ball bearing construction
- Quiet Operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Single cross flow fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty



**FK-165-ESC** ⤴

- Low profile compact design fits most fireplaces
- Sealed ball bearing construction
- Quiet Operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Single cross flow fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes FK-ESC fan control



**FK-165-RT** ⤴


- Low profile compact design fits most fireplaces
- Sealed ball bearing construction
- Quiet Operation
- Increased CFM provides more air movement
- Heavy duty quality construction
- Single cross flow fan blades
- Magnetic quick mount installation
- Anti-vibration magnetic mounting strips
- ETL certified to CSA C22.2 & UL-1004
- Two year warranty
- Includes Rheostat control temperature sensor





**FK-SPCONTROL** ⤴

Rheostat variable fan speed control

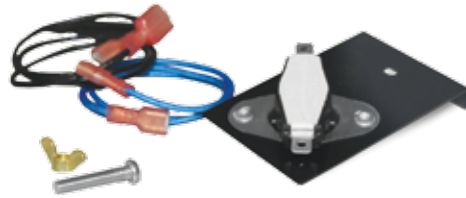

**FK-SENSOR** ⤴

Temperature sensor



**FK-ESC** ⤴

Multiple levels of fan speed control  
 Built in timer to activate fan  
 200 watt universal fan capacity  
 two year warranty



**FK-RTKIT** ⤴

Rheostat variable fan speed control  
 Temperature sensor with wiring  
 One year warranty



**ACM-24** ⤴

24 inch male cord



**ACF-10** ⤴

10 inch female cord

# Universal Fan Kit Accessories



# Pilot accessories...



### UNIVERSAL THERMOCOUPLES <sup>⤴</sup>

Universal replacement thermocouples  
 30 millivolt output  
 Copper coated for corrosion protection  
 Includes adapters for most installations  
 Available in 24, 30, 36 inch lengths  
 Available in the following models:  
 02-024 / 02-030 / 02-036



### UNIVERSAL THERMOPILES / PILOT GENERATOR <sup>⤴</sup>

Universal replacement thermopiles  
 750 millivolt output  
 For use with any ANSI Z21.20 systems  
 Available in 24 and 36 inch lengths  
 Available in the following models:  
 01-024 / 01-036



### STANDING PILOT (THERMOCOUPLE PILOT ASSEMBLY) <sup>⤴</sup>

Model#: 2385-9P  
 Universal pilot assembly for most vented gas log sets  
 Mounting bracket standard  
 Includes 30 millivolt thermocouple  
 Includes aluminum pilot supply line  
 Optional high limit energy cutoff  
 Fully assembled ready to install



### ELECTRONIC IGNITION PILOT ASSEMBLY <sup>⤴</sup>


Model#: 238577-13  
 Universal pilot assembly for spark to pilot ignition systems  
 Mounting bracket standard  
 Includes aluminum pilot supply line  
 Fully assembled ready to install





**Glass & media...**






**CARIBBEAN**  
GL- LIGHTBLUE



**COLA**  
GL- COPPER



**PEPPER**  
GL- BLACK



**BLUEBERRY**  
GL- DARKBLUE

## Fireglass (GL)

(Large broken approx. 1/2 inch to 3/4 inch in size.)

SOLD IN 5 LB. BAGS

---



**COBALT**  
GB - COBALT



**H2O**  
GB - CLEAR



**MIDNIGHT**  
GB - BLACK



**SKY**  
GB - LTBLUE



**TEQUILA**  
GB - GOLD



**WHITE**  
GB - WHITE

## Liquid Glass (GB)

(Glass beads approx. 16-18 mm in size.)


SOLD IN 5 LB. BAGS



**MINT**  
GL- GREEN



**COSMO**  
GL- RED



**CRYSTAL**  
GL- CRYSTAL




**SEABREEZE**  
GL- SEABREEZE

## Fireglass (GL)

(Large broken approx. 1/2 inch to 3/4 inch in size.)


SOLD IN 5 LB. BAGS



**COPPER**  
GR - COPPER



**GOLD FINGER**  
GR - GOLD



**COBALT**  
GR - COBALT



**PLATINUM**  
GR - PLAT



**EBONY**  
GR - BLACK



**BRONZE**  
GR - BRONZE

## Reflective Glass (GR)

(Mirror finish broken reflective approx. 3/8 inch to 1/2 inch in size.)

SOLD IN 5 LB. BAGS



FG-LAVA-10

FG-LAVA-50

## Lava Rock

Mined from the earth, these dark rocks contrast beautifully against a bright flame. Each rock is approximately 1 inch to 2 inch in diameter. Sold in 10-lb. and 50-lb. bags.

---



FG-LB30

## Lava Boulders

These rugged rocks are 6 inch to 12 inch in diameter, for a coastal, straight-off-the-beach style. Sold in a 30-lb. box.

---



FG-LS15

FG-LS50

## Lava Stones

Made from tumbled lava rock, these stones lend a casual elegance. Each stone is approximately 1-2 inch in diameter. Sold in 50 lb. bags and 15 lb. jugs.





Log sets  
for fire pits...



**L-SF**  
**SPIT FIRE**

This eighteen (18) piece refractory log set is a great alternative to enjoy your fire feature without the mess of real wood and ashes.

- Compatible with pits larger than 19 inches
- Refractory concrete material
- Ships as 1 box, weights approx 52 lb.
- 5 Year limited warranty



**L-BF**  
**BEACH FIRE**

The modest version of the Spit Fire, this 8 piece set is designed for smaller fire pit burners or used as an accent piece on larger burners.

- Compatible with pits smaller than 20 inches
- Refractory concrete material
- Ships in 1 box, weighs approx 20 lb.
- 5 Year limited warranty



**L-SEDONA**

The Sedona is the Grand Daddy of all the Firegear log sets. This nineteen (19) piece majestic fire pit log set can stack as high as 32 inch

- Compatible with pits larger than 25 inch
- Refractory concrete material
- Ships in 3 boxes, approx 200 lb, must ship LTL
- 5 Year limited warranty



**326-930**  
**TWIG SET**

Beach washed and twisted driftwood twigs inspired this design. The coloration in this 6 piece log set is truly unique.

- Compatible with any size fire
- Ceramic fiber composition
- Ships 1 box, weighs approx 22 lb.
- 1 Year limited warranty

## Log sets for fire pits





# Point of purchase displays...





**FG-JEWELRY-KIT**

A retail point of purchase display for all of the glass that we have to offer. The POP display holds up to 60 bags of your glass.



**GL-GLASS TOWER**

Spinning glass tower with 20 glass cylinders. 13 inches tall x 10 inches in diameter.



**POPCOUNTER**

Remote control counter display

Point-of-Purchase Displays



**LP hoses  
& regulators...**





### FG-32LPHRK

32 inch Liquid Propane Hose and Regulator Kit, Rated at 85,375 BTU 10 inch WC.  
CSA - AGA / CGA Approved,  $\frac{3}{8}$  inch Flared ID



### FG-12QDK

Quick Disconnect Kit for use with Natural Gas or Liquid Propane - 12 foot (144 inch),  $\frac{3}{8}$  inch I.D. Gray PVC Galvanized Steel Hose, Quick Disconnect Fitting and Socket Dust Cap, 80,000 BTU.  
CSA-AGA/CGA approved to -40° F



### FG-60LPHRK

60 inch Liquid Propane Hose and Regulator Kit, Rated at 73,800 BTU 10 inch WC.  
CSA - AGA / CGA Approved,  $\frac{3}{8}$  inch Flared ID



### FG-LPRK

Rated at 100,000 BTU Liquid Propane Regulator,  $\frac{3}{8}$  inch MPT Adapter and Acme Quick Connect.  
CSA-AGA/CGA approved

## LP hoses & regulators





Key valves,  
keys & covers...



**KVSC-PC-8**

Standard capacity straight key valve with polished chrome cover and 8 inch key  
158,000 BTU @ 1/2 PSI



**KVHC-PC-8**

High capacity straight key valve with polished chrome cover and 8 inch key  
354,000 BTU @ 1/2 PSI



**BVL-3LK-CP**

3/4 inch IPS angle key valve with chrome cover and 8 inch key  
400,000 BTU



**BVL-3SK-CP**

3/4 inch IPS straight key valve with chrome cover and 8 inch key  
400,000 BTU



**KEY-PTR-3**

3 inch pewter key for key valve



**KEY-BLK-3**

3 inch flat black key for key valve



**KEY-PC-8**

8 inch polished chrome key for key valve



**KEY-PC-3**

3 inch polished chrome key for key valve



**KEY-PC-12**

12 inch polished chrome key for key valve



**KEY-PC**

Key valve cover - polished chrome



**KC-PTR**

Key valve cover - Pewter  
Fits KVSC valve ONLY!



**KC-BLK**

Key valve cover - flat black  
Fits KVSC valve ONLY!

# Key valves, keys & covers





# Shut off valves & fittings...





**01-387**

Connector ball valve 3/8 inch OD flare x 1/2 inch FIP



**01-487**

Connector ball valve 1/2 inch OD flare x 1/2 inch FIP



**01-266**

Flare ball valve 3/8 inch OD flare x 3/8 inch OD flare



**01-288**

Flare ball valve 1/2 inch OD flare x 1/2 inch OD flare



**U1-6C-S**

Steel gas flare fitting, 3/8 inch OD flare x 3/8 inch MIP

Tapped 1/8 inch FIP



**U1-6D-S**

Steel gas flare fitting, 3/8 inch OD flare x 1/2 inch MIP

Tapped 3/8 inch FIP



**U3-6C-S**

Steel gas flare fitting, 3/8 inch OD flare x 3/8 inch FIP



**U1-8D-S**

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch MIP

Tapped 3/8 inch FIP



**49-66**

Steel gas flare fitting, 3/8 inch OD flare x 3/8 inch MIP Elbow



**50-68**

Steel gas flare fitting, 3/8 inch OD flare x 1/2 inch FIP Elbow



**U1-8C-S**

Steel gas flare fitting, 1/2 inch OD flare x 3/8 inch MIP

Tapped 1/4 inch FIP



**50-88**

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch FIP Elbow



**U3-8C-S**

Steel gas flare fitting, 1/2 inch OD Flare x 3/8 inch FIP



**U3-8D-S**

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch FIP



**49-88**

Steel gas flare fitting, 1/2 inch OD flare x 1/2 inch MIP Elbow



**46-88**

Brass female connector 1/2 inch OD x 1/2 inch FIP



**46-66**

Brass female connector 3/8 inch OD x 3/8 inch FIP



**42-R-86**

Brass reducing union 1/2 inch x 3/8 inch FIP



**46-86**

Brass female connector 1/2 inch OD x 3/8 inch FIP



**48-86**

Brass female connector 1/2 inch OD x 3/8 inch FIP

## Shut off valves and fittings



Flex lines...





**U3-6D-S**

Steel gas flare fitting  
3/8 inch OD flare x 1/2"  
FIP



**113BS-E5**

Schedule 40 black steel  
pipe nipple  
5 inch long 3/4 inch MIP



**113BS-C**

Schedule 40 black steel  
pipe nipple  
Close 3/8 inch MIP



**BS309-6**

Schedule 40 black steel  
90 degree elbow  
3/8 inch

CSA approved, stainless steel hearth connectors available in 3/8 inch and 1/2 inch OD with flared fittings stainless steel or black coated stainless. Tranquiline "non-whistling" gas flex lines with and without fittings



**MODEL**

- T100-9898-10
- T100-9898-16
- T100-9898-22
- T100-9898-28
- T100-9898-34
- T200-9898-10
- T200-9898-16
- T200-9898-22
- T200-9898-28
- T200-9898-34
- T200-9898-46

**DESCRIPTION**

- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 10 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 16 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 22 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 28 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 34 inch, with 3/8 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 10 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 16 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 22 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 28 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 34 inch, with 1/2 inch OD flare nuts
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 46 inch, with 1/2 inch OD flare nuts



**MODEL**

- T102-9898-10
- T102-9898-16
- T102-9898-22
- T102-9898-28
- T102-9898-34
- T202-9898-10
- T202-9898-16
- T202-9898-22
- T202-9898-28
- T202-9898-34

**DESCRIPTION**

- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 10 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 16 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 22 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 28 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 3/8 inch OD (1/4 inch ID) x 34 inch, with 3/8 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 10 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 16 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 22 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 28 inch, with 1/2 inch OD flare nuts, black coated
- Tranquiline flex connector, 1/2 inch OD (3/8 inch ID) x 34 inch, with 1/2 inch OD flare nuts, black coated



**UNIVERSAL FLEX KITS**

Available in models:  
UGIK18 / UGIK24 / UGIK36 / UGIK48

**Flex lines**



Skytech Products Group-Retail, including Skytech Systems and Firegear Outdoors (“SPG- Retail”), a Division of Skytech Products Group, has developed a Minimum Advertised Pricing (MAP) policy (the “Policy”) for all products sold by and purchased from SPG-Retail by and through traditional and/or online retailers (“Products”). In an effort to protect the image and value of SPG-Retail products and to maintain fair and equitable promotional and sales activity among its distributors, dealers, retailers and other resellers (each, a “Retailer”), SPG-Retail has developed the MAP Policy effective immediately. The MAP Policy and its terms and conditions are as follows:

#### POLICY

Subject to certain exceptions set forth below, no Retailer shall, at any time, advertise or promote any SPG-Retail Products for sale or resale at a price lower than the MAP pricing established by SPG-Retail for such Products.

#### APPLICATION

The MAP Policy shall apply to all promotions and/or advertisements of any Products purchased from SPG-Retail that appear in any media form, including, without limitation, written or electronic flyers, posters, coupons, mailers, inserts, newspapers, magazines, catalogs, mail order catalogs, Internet, online, or similar electronic media, websites, email newsletters, email solicitations, television, radio, and/or public signage. The MAP Policy shall not apply to (a) any in-store advertising displayed by a Retailer, in-store displays, point-of-sale signs, hang tags or bar codes, or similar product price packaging which merely state the price of such product; (b) the promotion or advertisement of discontinued Product, so long as such Product is clearly marked as discontinued within said advertisement or promotion; and (c) the actual price at which any Products are sold to an individual consumer at or from a Retailer’s physical location or via telephone.

#### OTHER TERMS AND CONDITIONS

MAP pricing is subject to change from time to time at the sole discretion of SPG-Retail and can be accessed by contacting SPG-Retail Divisions at (888) 672-8929, or by written request via email at [info@skytechpg.com](mailto:info@skytechpg.com). It shall be the responsibility of all Retailers to remain current as to MAP Policy, pricing, and any changes thereto.

The MAP Policy shall apply to all Products sold to SPG-Retail distributors and resold thereby to any Internet or online dealers and retailers, and such distributors shall take all necessary steps to enforce the MAP Policy in connection with each and every such resale.

By accepting Products from SPG-Retail and in consideration of continued access to Products and the benefits realized as an SPG-Retail preferred, approved Retailer, each Retailer accepts and all Products they purchase from SPG-Retail shall be and remain subject to the MAP Policy as set forth herein. Should it be determined that any Product subject to the MAP Policy is or has been advertised or promoted at a price below the MAP pricing established for said Product by SPG- Retail at any time, the violating Retailer shall immediately take all steps necessary to cure said violation and bring its advertising, promotion, pricing and sales activity into compliance with the MAP Policy. SPG-Retail hereby, at any time, reserves the right to discontinue the shipment of Products to the violating Retailer and/or its distributor, and the right to terminate future sales of Products to said violating Retailer and/or its distributor, subject to the parties’ respective financial and confidential obligations that shall survive such termination.

## MAP Policy

---

#### Skytech Remote Control Warranty Replacement Policy

We understand that with our 5-year limited warranty products can sometimes fail whether they are new or still under warranty. However in order for us to provide the best possible service to you our policy is as follows:

If you feel you have a defective Skytech Remote Control and it is under warranty, that part must be returned to us for evaluation before a replacement will be sent. We will request you to send the product to us for evaluation providing us with your name, address, telephone number and short description of what is wrong with your remote. At the same time, if the remote is under warranty we request a copy or original receipt of date of purchase to ensure we can cover it under the warranty. In some cases we may assign you a Returned Materials Allocation (RMA) number. Once the evaluation has been conducted, if we find the remote control defective or it can be reworked we will send you a new replacement or your fully functioning original remote back to you at no charge.

If you cannot wait for the replacement part to be evaluated due to time constraints or certain situations you have the option to purchase a new remote. If you wish to have that replacement part expedited you will be charged for the shipping costs incurred.

Our Skytech Technical Support telephone line is 855.498.8324. If you have questions or concerns about the operation of your remote control please feel free to call us anytime between 8:00AM – 5:00PM EST.

## Warranty Policy

---



# SKYTECH

PRODUCTS GROUP

9230 CONSERVATION WAY  
FT. WAYNE, IN 46809

MAIN: 260.459.1703  
FAX: 260.459.1592

TECHNICAL SUPPORT: 855.498.8324  
SALES SUPPORT: 888.672.8929

[skytechpg.com](http://skytechpg.com)